

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____


Representative _____

LFTP300-DR

Trap Primer & Distribution Unit

Specification

Watts LFTP300-DR pressure drop activated lead free* brass trap primer with EPDM seals, integral air gap, and 1/2" sweat or NPT threaded connections. Operating pressure 25 psi - 125 psi. Tested and approved in conformance with ASSE Standard 1018. Specify Model LFTP300-DU-DR for Distribution Unit.

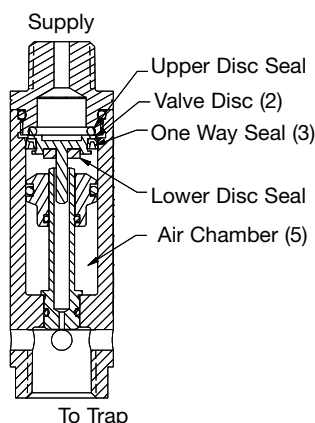

Call customer service if you need assistance with technical details.

Flow Chart

INLET PRESSURE	25	50	75	100	125
*GPM	1.1	1.6	2.0	2.3	2.4
*LPM	4.2	6.1	7.6	8.7	9.1


NOTICE

*Minimum cold flow required for proper trap priming.


NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

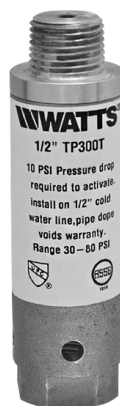


Model LFTP300T-DR

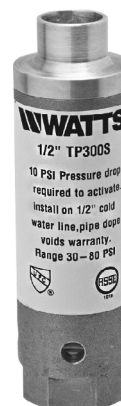


Model LFTP300S-DR




Model LFTP300-DU-DR

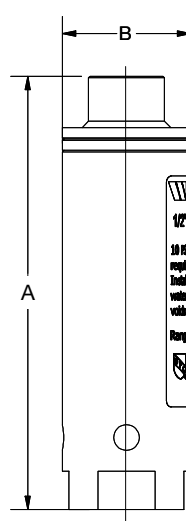

LFTP300T-DR

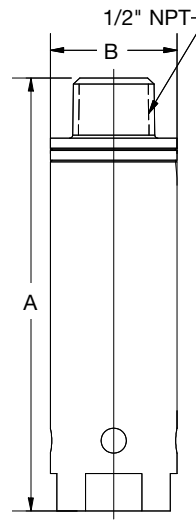

LFTP300S-DR



LFTP300-DU-DR

MODEL	SIZE (DN)	DIMENSIONS					
		A			B		
		in.	mm	in.	mm	in.	mm
LFTP300T-DR	1/2 Threaded	15	4 5/16	110	1 1/4	32	
LFTP300S-DR	1/2 Sweat	15	4 1/4	107	1 1/4	32	
LFTP300-DU-DR	1/2	15	3 1/8	79	2 13/16	71	



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-LFTP300-DR 2629

© 2026 Watts