

## For Residential and Commercial Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# LEAD FREE\*

## Poly-Alloy CrimpRing™ Tees

Poly-Alloy CrimpRing™ Tees are used for making directional changes in potable systems.

### Specifications

System shall be plumbed using Watts WaterPEX® cross-linked polyethylene pipe, and all joints shall be made using Watts brass CrimpRing™ and/or poly-alloy CrimpRing™ fittings using either the Watts copper CrimpRing™ or stainless steel CinchClamp™\*\* crimping methods as outlined in the Watts WaterPEX® Installation Guidelines.

### Installation Note

CrimpRing™ Tees must be installed in accordance with all Watts WaterPEX® installation procedures, including information provided in WaterPEX® installation manual and guidelines.

### Approvals



- Manufactured in accordance with American Society for Testing and Materials (ASTM) F-877 and F-2159
- Listed by the National Sanitation Foundation to NSF Standards 14 and 61 for use in potable water systems
- Listed by NSF to be in compliant to the Uniform Plumbing Code
- Labeled B137.5 which indicates that it is compliant to the CSA Standards B137.5
- Manufactured from Acudel® engineered thermoplastic resin.

\*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

\*\*Note: Watts WaterPEX CinchClamp™ fittings should not be used with wrot copper PEX fittings.




WP18P  
CrimpRing™ Tee

### Warning!

If connections must be made in temperatures below 30°F, caution must be taken to allow the WaterPEX to form a proper seal against the barb. Apply the connection slowly to ensure the PEX material conforms to the barb.

## Dimensions – Weights

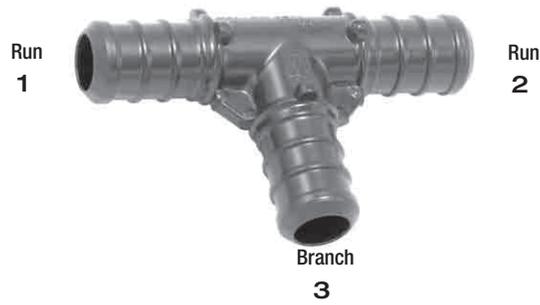

MODEL	1			2			3			PKG. WEIGHT	
	<i>in.</i>	<i>mm</i>	<i>type</i>	<i>in.</i>	<i>mm</i>	<i>type</i>	<i>in.</i>	<i>mm</i>	<i>type</i>	<i>lbs.</i>	<i>kgs.</i>
WP18P-08PB	1/2	15	Crimp Fitting	1/2	15	Crimp Fitting	1/2	15	Crimp Fitting	1	0.4
WP18P-080812PB	1/2	15	Crimp Fitting	1/2	15	Crimp Fitting	3/4	20	Crimp Fitting	1	0.4
WP18P-120808PB	3/4	20	Crimp Fitting	1/2	15	Crimp Fitting	1/2	15	Crimp Fitting	1	0.4
WP18P-120812PB	3/4	20	Crimp Fitting	1/2	15	Crimp Fitting	3/4	20	Crimp Fitting	2	0.9
WP18P-121208PB	3/4	20	Crimp Fitting	3/4	20	Crimp Fitting	1/2	15	Crimp Fitting	2	0.9
WP18P-12PB	3/4	20	Crimp Fitting	3/4	20	Crimp Fitting	3/4	20	Crimp Fitting	2	0.9
WP18P-121216PB	3/4	20	Crimp Fitting	3/4	20	Crimp Fitting	1	25	Crimp Fitting	3	1.4
WP18P-161212PB	1	25	Crimp Fitting	3/4	20	Crimp Fitting	3/4	20	Crimp Fitting	3	1.4
WP18P-161608PB	1	25	Crimp Fitting	1	25	Crimp Fitting	1/2	15	Crimp Fitting	3	1.4
WP18P-161612PB	1	25	Crimp Fitting	1	25	Crimp Fitting	3/4	20	Crimp Fitting	3	1.4
WP18P-16PB	1	25	Crimp Fitting	1	25	Crimp Fitting	1	25	Crimp Fitting	3	1.4



A Watts Water Technologies Company



ISO 9001-2008  
CERTIFIED

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca