

## Installation Instructions for Restraining Device For Use with Castered Appliances

### WARNING



Read this Manual **BEFORE** using this equipment. Failure to read and follow all safety and use information can result in death, serious personal injury, property damage, or damage to the equipment. Keep this Manual for future reference.



### Restraining Device Required per the Following Standards:

- ANSI Z21.69/CSA 6.16 Gas Connectors for Moveable Gas Appliances
- ANSI Z21.41/CSA 6.9 Quick Disconnect Devices
- ANSI Z83.11/CGA 1.8 Commercial Gas Ranges
- ANSI Z83.12/CGA 1.9 Commercial Gas Ovens
- ANSI Z83.13 Commercial Gas Fryers
- ANSI Z223.1/NFPA 54 National Fuel Gas Code Section 5.5.1.e
- CSA - B149.1 Natural Gas and Propane Installation Code

### WARNING

**This Restraining Device Must Always Be Connected When the Appliance Is in Service**



The restraining device should be disconnected for movement, such as, servicing or cleaning, **only after gas has been shut off and the connector has been disconnected!**

Reconnect restraining cable **before** reconnecting the gas connector and moving back to its original position.

Please refer to installation instructions tag on every connector for detailed information, as specified in ANSI Z21.69/CSA 6.16

### NOTICE

The gas connector must be installed in accordance with the National Fuel Gas Code (ANSI Z223.1/NFPA 54) and any State or Local Code requirements.

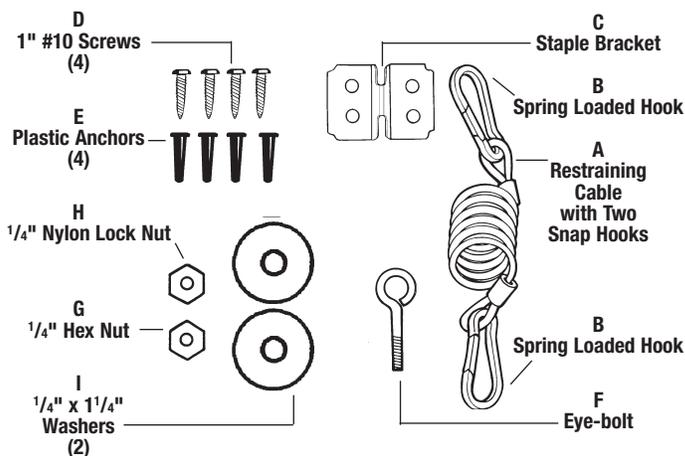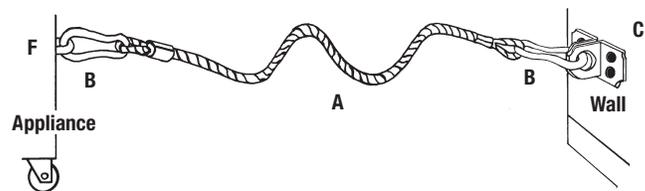

### Installation Instructions

- Restraining Device should be installed parallel (in line) with the gas appliance connector.
- Attach the staple bracket (C) to a stud in the wall, using the four 1" #10 screws (D) and the plastic anchors (E), if needed.
- Locate a structural area (frame) on the rear side of the equipment that is in line with the wall attachment. Drill a small hole 1/4" (per manufacturers' recommendation). Please use caution when drilling hole, so that internal components are not damaged.
- Thread the hex nut (G) and slide one washer (I) onto the eye-bolt (F). Slide the eye-bolt through the drilled hole and place a washer (I) and the nylon lock nut (H) onto the eye-bolt on the inside frame of the equipment and tighten securely.
- Attach one of the spring-loaded hooks (B) to the mounted bracket on the wall (Step 2) and the other to the eye-bolt (Steps 3 and 4).

### NOTICE

For adjustable restraining devices, the cable is manufactured to be shorter than the length of the gas connector.

SCAN FOR MORE INFO



Dormont product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Dormont Technical Service. Dormont reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Dormont products previously or subsequently sold. Refer to the owner's manual for warranty information.

**Dormont**  
A WATTS Brand

**Limited Warranty:** Watts Regulator Co. (the "Company") warrants each product to be free from defects in material and workmanship under normal usage for a period of one year from the date of original shipment. In the event of such defects within the warranty period, the Company will, at its option, replace or recondition the product without charge.

**THE WARRANTY SET FORTH HEREIN IS GIVEN EXPRESSLY AND IS THE ONLY WARRANTY GIVEN BY THE COMPANY WITH RESPECT TO THE PRODUCT. THE COMPANY MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED. THE COMPANY HEREBY SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

The remedy described in the first paragraph of this warranty shall constitute the sole and exclusive remedy for breach of warranty, and the Company shall not be responsible for any incidental, special or consequential damages, including without limitation, lost profits or the cost of repairing or replacing other property which is damaged if this product does not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, or any other circumstances over which the Company has no control. This warranty shall be invalidated by any abuse, misuse, misapplication, improper installation or improper maintenance or alteration of the product.

Some States do not allow limitations on how long an implied warranty lasts, and some States do not allow the exclusion or limitation of incidental or consequential damages. Therefore the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State to State. You should consult applicable state laws to determine your rights. **SO FAR AS IS CONSISTENT WITH APPLICABLE STATE LAW, ANY IMPLIED WARRANTIES THAT MAY NOT BE DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO ONE YEAR FROM THE DATE OF ORIGINAL SHIPMENT.**

