


SPECIFICATION: Watts Drainage Products CA-151-D back-to-back vertical fixed water closet carrier with offset epoxy coated cast iron fitting, 4"(102) no hub (MJ) waste and 2"(51) no hub (MJ) vent connections, epoxy coated iron faceplate and foot support adjustable for standard or handicapped height, adjustable ABS nipple with integral test cap and neoprene bowl gasket, plated hardware and chrome cap nuts.

FUNCTION: For installation where back-to-back water closets are installed on common stack in multi-floor installation where minimum pipe space is required. Suitable for handicapped application.

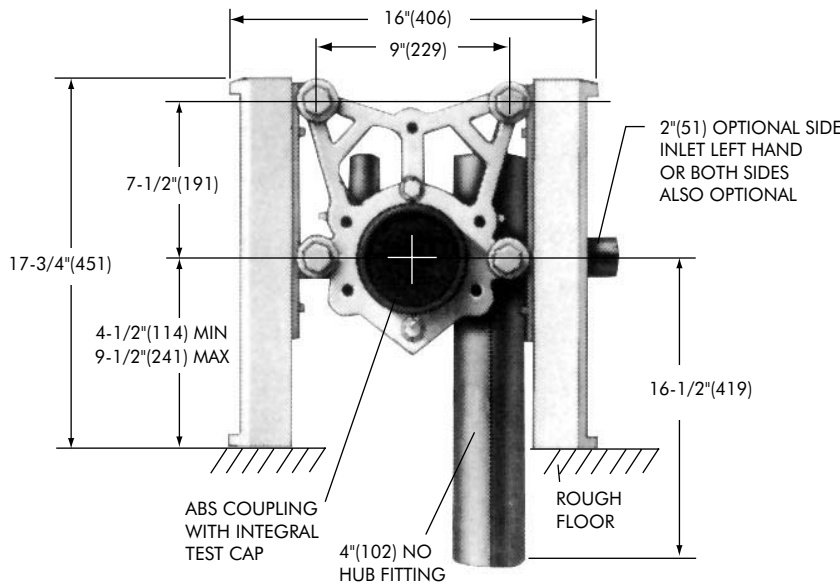

Carrier Replacement Parts	
Suffix	Description
CA-1G	Neoprene Closet Gasket ☐
CAP-NUTS	Set (4) Chrome Plate Cap Nuts & Washers ☐
M1	Extended Plastic Coupling 7"-14" ☐
M2	Extended Plastic Coupling 14"-22" ☐
M3	Extended Cast Coupling 7" ☐
M4	Extended Cast Coupling 7"-14" ☐
M5	Extended Cast Coupling 14"-22" ☐
M11	Finishing (tiling) Frame ☐
M12	Rear Support Anchor ☐
M16	Vandal Proof Hardware ☐
M20	Flush Valve Support ☐
M30	Special Faceplate w/ Grab Bar Supports ☐
M66	Auxiliary Coupling Support (Recommended for Length over 12") ☐


SIPHON JET(4 BOLT) ARRANGEMENT SHOWN. FOR BLOW OUT, (3 BOLT) INVERT FACEPLATE.

"X" = 6-13/16"(173) MAXIMUM
13/16"(21) MINIMUM

STANDARD COUPLING WILL NEED TO BE TRIMMED FOR "X" DIMENSIONS LESS THAN 5-13/16"(148)

PRODUCT ALERT!

DO NOT USE WITH BLOW-OUT BOWL ARRANGEMENT!

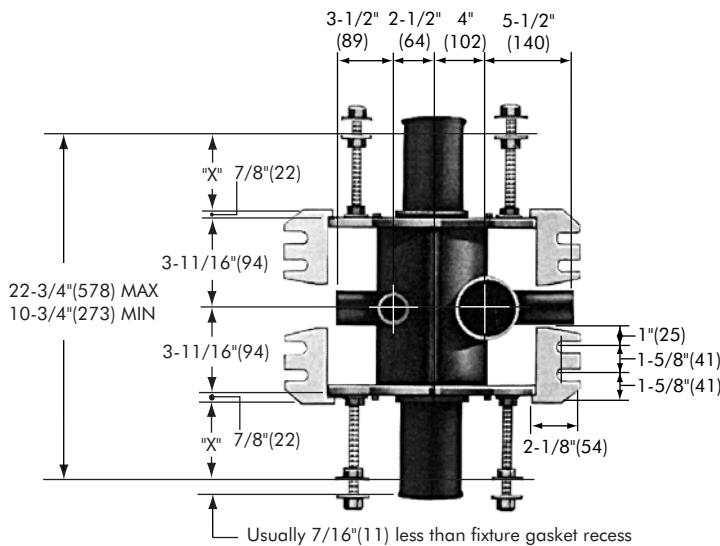

Foot supports should be securely anchored to floor with 1/2" bolts and anchors by others

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.