Engineering Specification

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

CA-402

Floor Mounted Lavatory Carrier with Exposed Arms

Specification

Watts CA-402 grey, baked epoxy coated fabricated exposed arms, rectangular steel structural uprights, free-standing design (independent foot supported carrier).

Function

Recommended for support of wall-hung fixtures independent of wall. Exposed arms provide support of fixtures which are not drilled for concealed arms such as semi-countertop lavatories.

Call customer service if you need assistance with technical details.


Options		
Suffix	Description	
-M51	Wall Thickness over 5",	
	per add inch (Single)	
-M52	Wall Thickness over 12",	
	per inch (Back-to-Back)	
-M53	Vandal Proof Trim (Single)	
-M59	Floor to Ceiling Adaptor, Single	
-M60	Valve Supporting Plate, Single	
-M61	Valve Supporting Bar, Single	
-M62	Flush Valve Piping Support, Single	


NOTICE

Foot supports should be securely anchored to floor with 1/2"(13) bolts and anchors (by others).

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

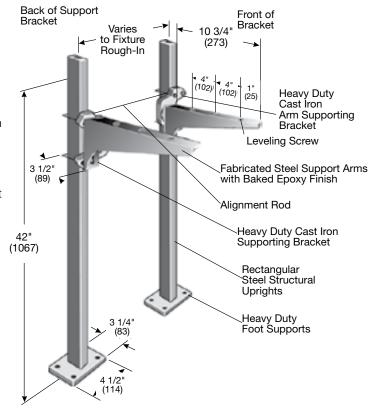

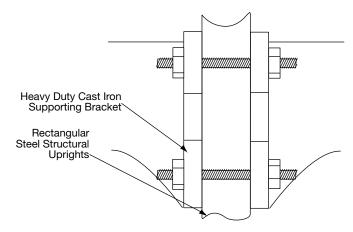

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: T: (800) 338-2581 • Watts.com **Canada:** T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-CA-402 2345 © 2023 Watts