## **Engineering Specification**

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative


## **FD-170-P**


# Floor Drain With Integral Trap Specification

Watts FD-170-P epoxy coated cast iron body with integral trap & 1-1/2"(38) plug, flashing reversible clamp and satin nickel bronze (standard) adjustable strainer.

Strainer			
Suffix Description			
A5-1	5"(127) Dia., Nickel Bronze		
A5-3	5"(127) Diameter, Stainless Steel		
A6-1	6"(152) Diameter, Nickel Bronze		
A6-3	6"(152) Diameter, Stainless Steel		
A7-1	7"(178) Diameter, Nickel Bronze		
A8-1	8"(203) Diameter, Nickel Bronze		
5-1	5"(127) Diameter, Nickel Bronze		
5-4	5"(127) Diameter, Ductile Iron		
6-1	6"(152) Diameter, Nickel Bronze		
8-1	8"(203) Diameter, Nickel Bronze		
L5-1	5"(127) Sq., Nickel Bronze		
L5-4	5"(127) Sq., Ductile Iron		
L6-1	6"(152) Sq., Nickel Bronze		
L8-1	8"(203) Sq., Nickel Bronze		

Options		
Suffix	Description	
-B	Sediment Bucket	
-13	All Galvanized	
-49	Chrome Plated Strainer	

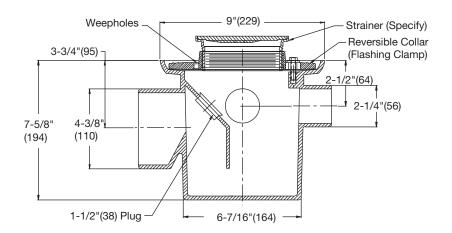

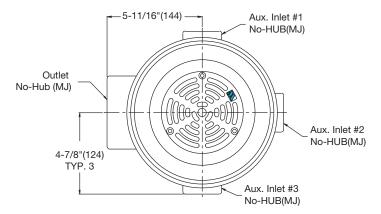

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

WATTS

**USA:** T: (800) 338-2581 • Watts.com **Canada:** T: (888) 208-8927 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com