

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Tag _____

FD-390-E

General Purpose Floor Drain

Specification

Watts FD-390-E epoxy coated cast iron floor drain with 5"(127) diameter top, secured ductile iron (standard) grate, and no hub (MJ) (standard) outlet.


Pipe Sizing	
Suffix	Description
2	2"(51) Pipe Size
3	3"(76) Pipe Size
4	4"(102) Pipe Size
6	6"(152) Pipe Size

Outlet Type	
Suffix	Description
NH	No Hub (MJ)
P	Push On
T	Threaded Outlet
X	Inside Caulk

Optional Body Material	
Suffix	Description
-60	PVC Body w/Socket Outlet
-61	ABS Body w/Socket Outlet

Grate	
Suffix	Description
E-1	5"(127), Nickel Bronze
E-4	5"(127), Ductile Iron

Options	
Suffix	Description
-5	Sediment Bucket
-6	Vandal Proof
-8	Backwater Valve (3, 4" Only)
-12	Galvanized Top
-13	All Galvanized
-113M	Special Epoxy from 3M Range
-Z	Elastomeric Flange

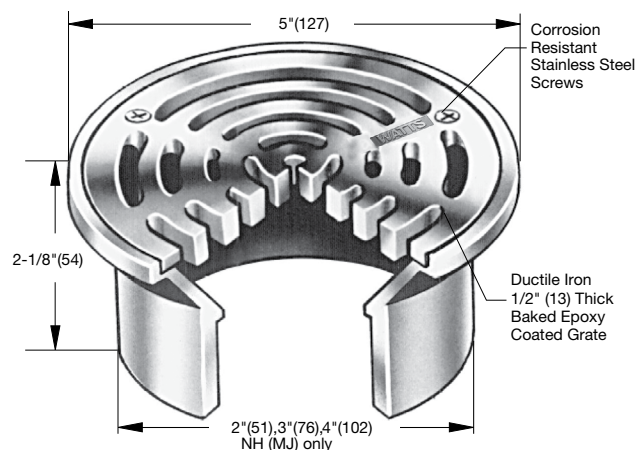

Load Rating & Free Area		
Suffix	Load Rating	Free Area Sq. In.
-1	*MD	8
-4	*MD	8

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

NOTICE

* The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:
MD - Safe Live Load 2000-4999 lbs.(900-2250kg)
The above categories are given as a guide only.
Please consult factory.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 338-2581 • Watts.com

Canada: T: (888) 208-8927 Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com

ES-WD-FD-390-E 2305

© 2023 Watts