

## For Commercial Applications

Job Name \_\_\_\_\_

Job Location \_\_\_\_\_

Engineer \_\_\_\_\_

Approval \_\_\_\_\_

Tag \_\_\_\_\_

Contractor \_\_\_\_\_

Approval \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Representative \_\_\_\_\_

# FD-410

## Parking Area Catch Basin with Heavy Duty Grate

### Specification:

Watts FD-410 epoxy coated steel parking area catch basin with anchor flange, 21<sup>13</sup>/<sub>16</sub>"x21<sup>13</sup>/<sub>16</sub>"(554x554) top with loose set heavy duty cast iron grate, and no hub (MJ) outlet.

### Function:

Recommended for installation in garages, service and parking areas, etc. subject to heavy vehicular traffic, where extra large facilities with catch basin are desired.

Pipe Sizing (Select One)		
Suffix	Description	
3	3"(76) Pipe Size, NH (MJ)	<input type="checkbox"/>
4	4"(102) Pipe Size, NH (MJ)	<input type="checkbox"/>
6	6"(152) Pipe Size, NH (MJ)	<input type="checkbox"/>

Depth (Select One)		
Suffix	Description	
A	18"(457) Depth	<input type="checkbox"/>
B	24"(610) Depth	<input type="checkbox"/>
C	30"(762) Depth	<input type="checkbox"/>
D	36"(914) Depth	<input type="checkbox"/>
E	Special Depth	<input type="checkbox"/>


Options (Select One or More)		
Suffix	Description	
-C	Membrane Clamp	<input type="checkbox"/>
-SI	Per Additional Side Inlet	<input type="checkbox"/>
-SIT	Side Inlet & Trap	<input type="checkbox"/>
-T	Threaded Inlet/Outlet	<input type="checkbox"/>

Load Rating	Free Area Sq. In.
*XHD	162

### NOTICE

The load classifications are in accordance with the American National Standards ASME A112.21.1M ASME Ratings are as follows:  
 XHD - Safe Live Load 7500-10000 lbs.(3375-4500 kg)  
 The above categories are given as a guide only.  
 Please consult factory.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

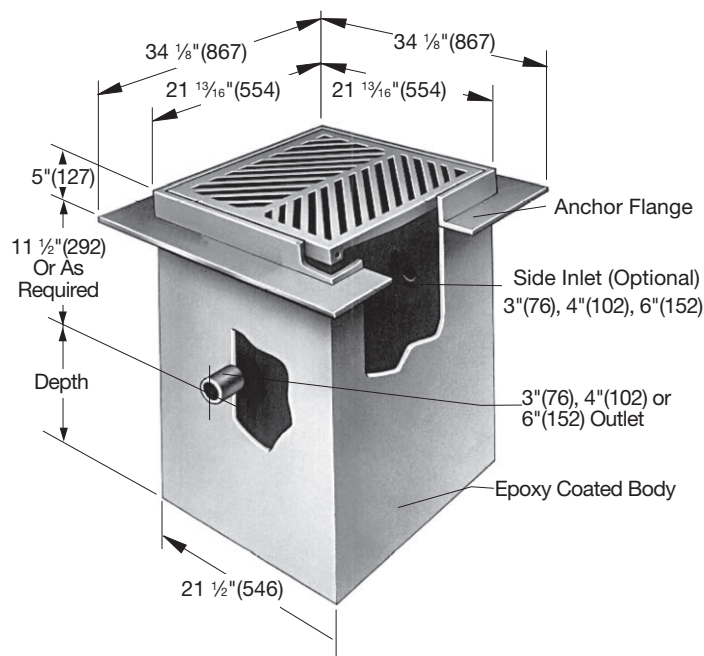

### Approvals



### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.



USA: T: (800) 338-2581 • F: (828) 248-3929 • Watts.com

Canada: T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca

Latin America: T: (52) 55-4122-0138 • Watts.com