

Engineering Specification

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

RD-300
High Volume Roof Drain
Specification

Watts RD-300 epoxy coated cast iron roof drain with flashing clamp with integral gravel stop, self-locking polyethylene dome (standard), and no hub (standard) outlet.



Call customer service if you need assistance with technical details.


Pipe Sizing		
Suffix	Description	
2	2"(51) Pipe Size (NH Only)	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐
5	5"(127) Pipe Size (NH Only)	☐
6	6"(152) Pipe Size	☐
8	8"(203) Pipe Size	☐
10	10"(254) Pipe Size (NH Only)	☐

Outlet Type		
Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
X	Inside Caulk	☐

Free Area Sq. In.
15

Options		
Suffix	Description	
-13	Galvanized Body & Clamp	☐
-85	IRMA Perf. SS Extension	☐
-AC	Compression Seal Extension	☐
-AE	Threaded Extension	☐
-B	Sump Receiver	☐
-D	Underdeck Clamp	☐
-F	Deck Flange/Adj. Extension	☐
-GSS	Stainless Steel Ballast Guard	☐
-K	Ductile Iron Dome	☐
-K13	Galvanized Dome	☐
-K40	Ductile Iron Low Dome (4" High)	☐
-K80	Aluminum Dome	☐
-K81	Rough Bronze Dome	☐
-K83	SS Mesh Covered Dome	☐
-L	Vandal Proof Dome	☐
-R	2" External Water Dam	☐
-W	Internal Water Dam	☐

Deck Opening: 14 1/2"(368)
with Sump Receiver 18"(457)

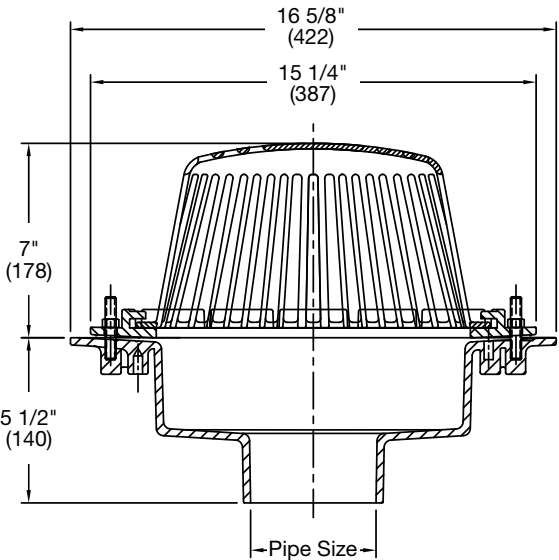

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

